


Precut shims

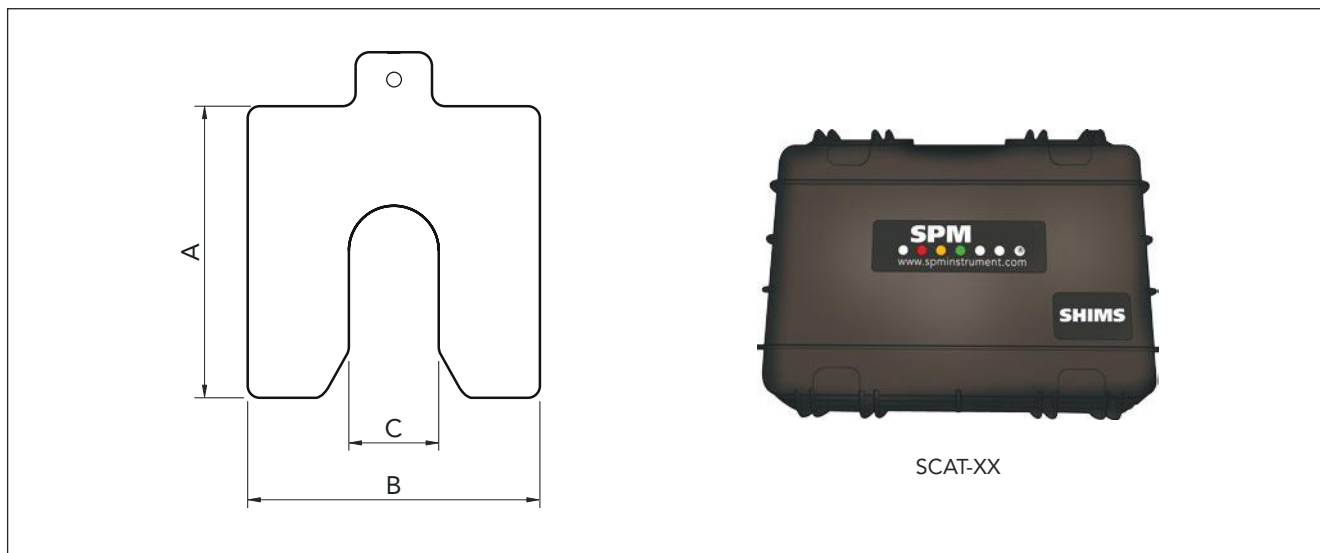

In the shaft alignment process, precut shims can be used to correct the exact vertical position of a movable machine so it will be in alignment with the stationary or reference machine.

Shims in packs of 10

Shims in stainless steel are available in six different dimensions and in ten different thicknesses, from 0.05 to 3.00 mm. Shims are supplied in packs of 10 in single thickness, according to the ordering number tables to the right.

Industrial cases with precut shims

Shims are also available packaged in convenient cases with a compartmentalised high density foam insert. The refillable cases are available with five different assortments, where every case of precut shims offers a combination of popular shim dimensions and thicknesses. The small cases have dimensions of 305x230x115 mm and the large cases have dimensions of 435x295x155 mm.

Ordering numbers, cases with solid shims

- SCAT-91 Small case with 180 shims: 10 pcs of A-/B-/C-0.05/0.10/0.20/0.50/0.70/1.0
- SCAT-01 Small case with 360 shims: 20 pcs of A-/B-/C-0.05/0.10/0.20/0.50/0.70/1.0
- SCAT-92 Large case with 360 shims: 10 pcs of A-/B-/C-/D-0.05/0.10/0.20/0.40/0.50/0.70/0.80/1.0/2.0
- SCAT-02 Large case with 680 shims: 20 pcs of A-/B-/C-/D-0.05/0.10/0.20/0.40/0.50/0.70/0.80/1.0 and 10 pcs of A-/B-/C-/D-2.0
- SCAT-32 Large case with 340 shims: 20 pcs of C-/D-0.05/0.10/0.20/0.40/0.50/0.70/0.80/1.0 and 10 pcs of C-/D-2.0. Empty rows for A and B shims.

10 stainless steel shims, single thickness

Dimension			Ordering numbers				
A	B	C	Thickness (mm)				
A	B	C	0.05	0.10	0.20	0.40	0.50
55	50	15	A-005	A-010	A-020	A-040	A-050
75	70	23	B-005	B-010	B-020	B-040	B-050
90	80	32	C-005	C-010	C-020	C-040	C-050
125	105	44	D-005	D-010	D-020	D-040	D-050
200	200	55	F-005	F-010	F-020	F-040	F-050
200	200	85	G-005	G-010	G-020	G-040	G-050

10 stainless steel shims, single thickness

Dimension			Ordering numbers				
A	B	C	Thickness (mm)				
A	B	C	0.70	0.80	1.00	2.00	3.00
55	50	15	A-070	A-080	A-100	A-200	A-300
75	70	23	B-070	B-080	B-100	B-200	B-300
90	80	32	C-070	C-080	C-100	C-200	C-300
125	105	44	D-070	D-080	D-100	D-200	D-300
200	200	55	F-070	F-080	F-100	F-200	F-300
200	200	85	G-070	G-080	G-100	G-200	G-300